


R-10/20 Magnetic Card Reader

TTL Interface Magnetic Stripe Card Reader

The R-10/20 family of magnetic card readers is designed for reading standard or high-coercivity magnetic stripe cards. The R-20 card reader also provides a 12-key keypad for PIN entry. The R-10/20 readers have a TTL (Data 1/0 or Clock/Data) interface. The reader may be mounted vertically or horizontally. The reader has a RJ-11 modular jack for easy field connection. A small piece of pre-terminated cable is supplied with each reader for field wiring. The reader is rated to operate over extended temperatures and is weather proofed. The housing is made of highly durable cast aluminum and can be mounted in a single gang junction box. Visual and audio feedback are provided by red and green LED's and audible beeper. The R-10 reader and the R-20 reader with keypad are built to provide years of reliable service in the most demanding access control applications by incorporating a high quality card reader in a tough metal housing.

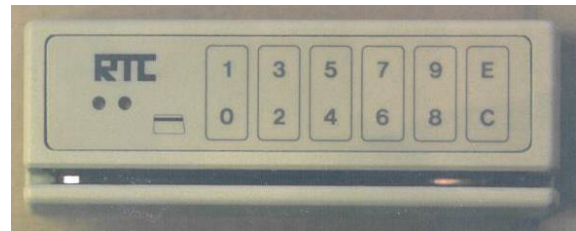

SPECIFICATIONS

Power:	Voltage -	+5Vdc or +12Vdc
	Current -	50mA (35mA typical)
Data:	Interface-	TTL
		2 Wire Data 1/0 or Clock/Data
Card:		75bpi, ANSI x 4.16, Speed 3 to 50 ips
Mechanical:	Dimension -	1.95"W x 1.30"H x 5.50"L
	Weight -	10 oz
Environmental:	Temperature-	-50 to +85 degrees C, storage
	Humidity -	-40 to +75 degrees C, operating 0 to 95 % RHNC, standard 100%

Phone: 860-354-0078
Fax: 860-350-8957

RTC Associates, Inc.
41 Grove Street, PO Box 868
New Milford, CT 06776

e-mail: info@rtcassociates.com
www.rtcassociates.com